


STANDARD INSTALLATION

24 v Power Source

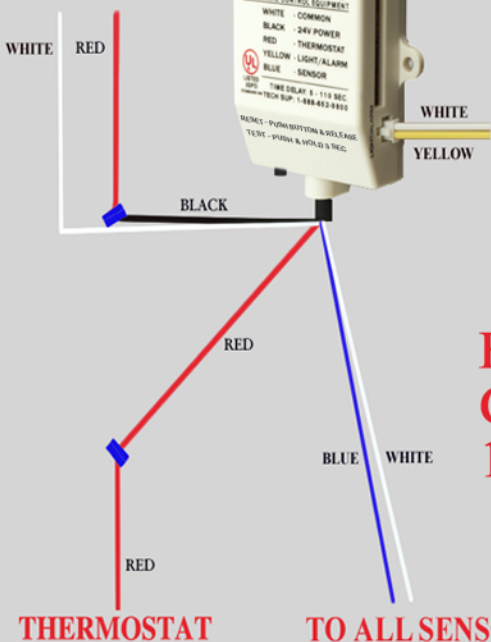

**SNAP IN OPTION
FOR 24 VOLTS
IN LOCK OUT MODE**

**Use for Remote Light, Alarm,
Relay, To Activate Building
Automation Systems, etc.**

**For 24v DC
Call Tech Support
1-888-652-9800**

**Cut the Red thermostat wire between the 24v power source and the thermostat.
Connect the Black wire from the Water Gard control to the Power Source side.
Connect the Red wire from the Water Gard control to the Thermostat side.
Connect the White (common) wire from the Water Gard control to the Common
on the 24v power source.**

After installation is complete: Test with Test/Reset Button